

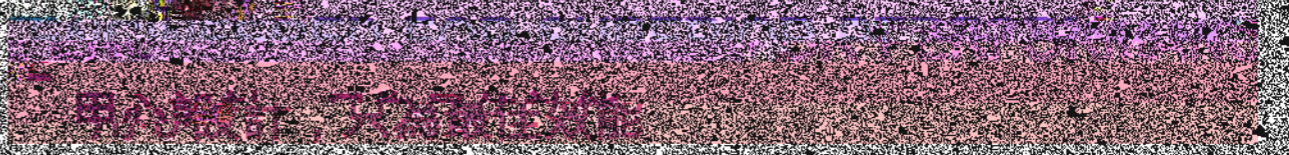



We provide superior performing compressed air & gas systems with



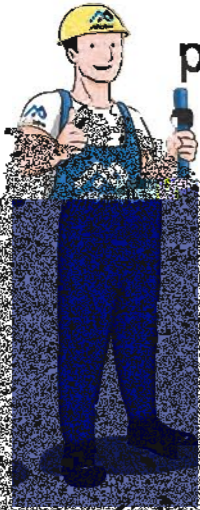



Superior Reliability & Longevity 最佳可靠性和使用年限

- Highly durable materials resistant to corrosion, vibration, thermal variation, and outdoor weather conditions.
- Metal clamshell connectors for all diameters are stronger and more durable versus polymer fittings.
- Unique grab ring design (20-50mm) and lugged ring (63-200mm) allows for zero risk of disconnection.
- Patented active concentric seals provide leak free performance, even in high vibration applications. Seal lifespan is double that of industry competitors.
- 耐腐蝕金屬材質與鹽化聚合物材質相比，强度高，壽命長，有效抵抗銹蝕，振動，熱脹冷縮及室外安裝的惡劣環境。
- 專利的抱箍式快插接頭技術，壽命是普通旋插式的一倍，並且更加穩定及抗衝擊。
- 專利設計的主動式壓力密封圈，耐壓更高，壽命更長，杜絕洩漏隱憂。

Quick & Easy Modular Installation 便捷的模組化安裝

- Complete range of pipe, fittings and accessories works easily for new projects renovations & extensions.
- R
- R

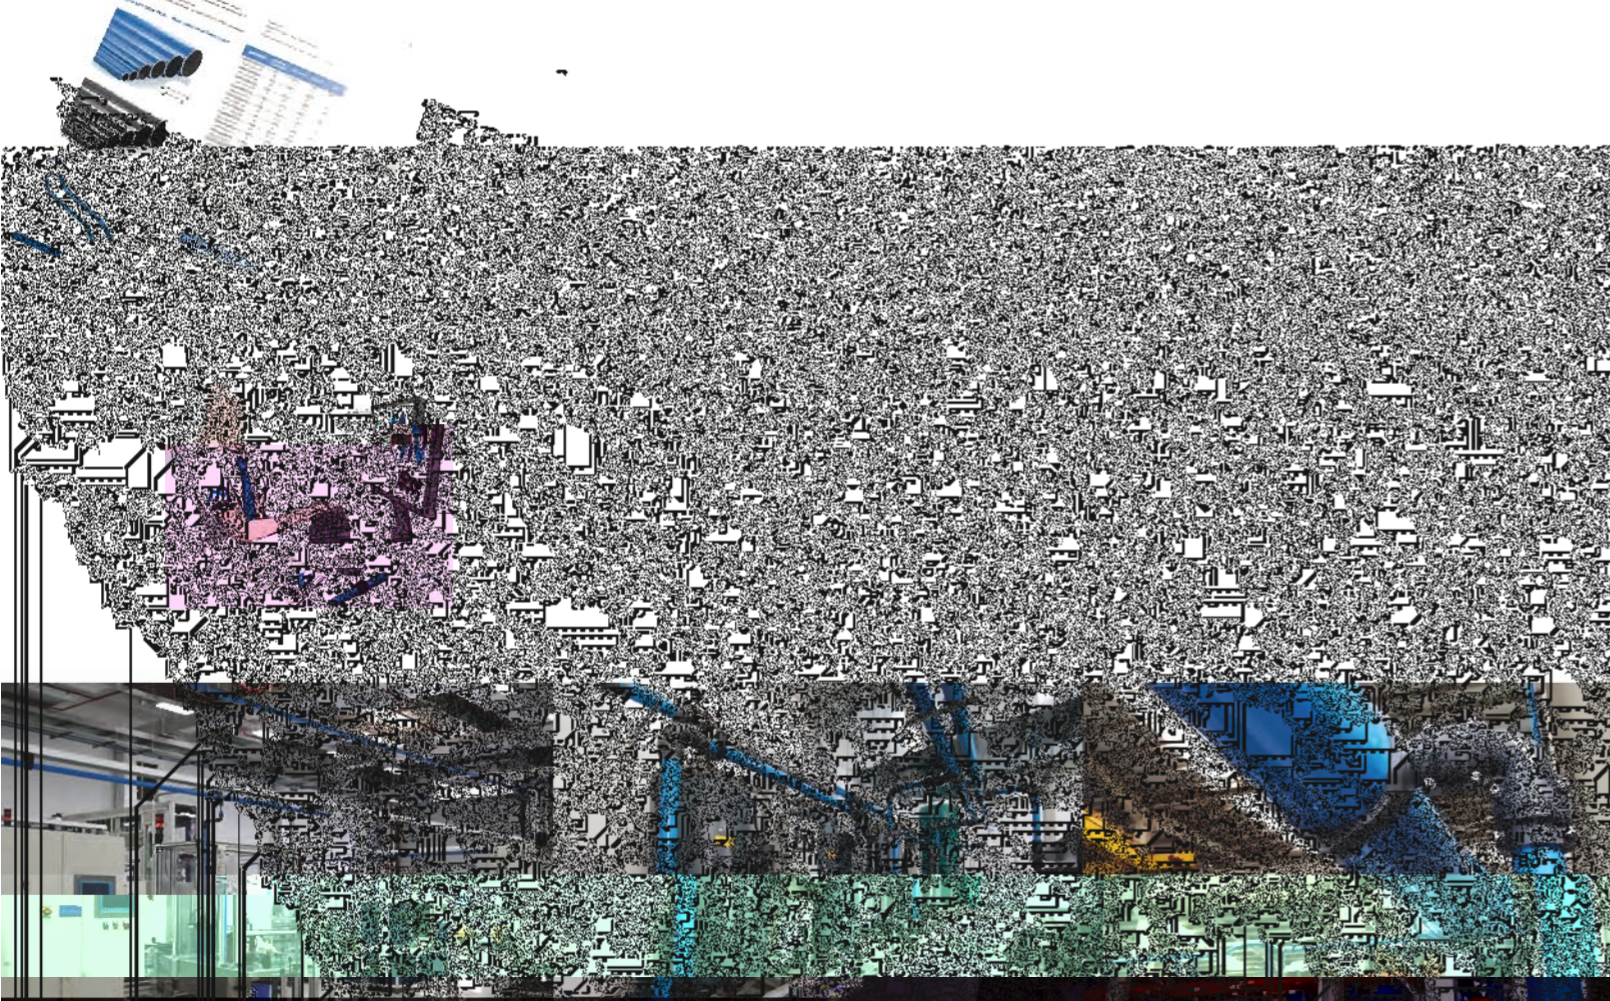

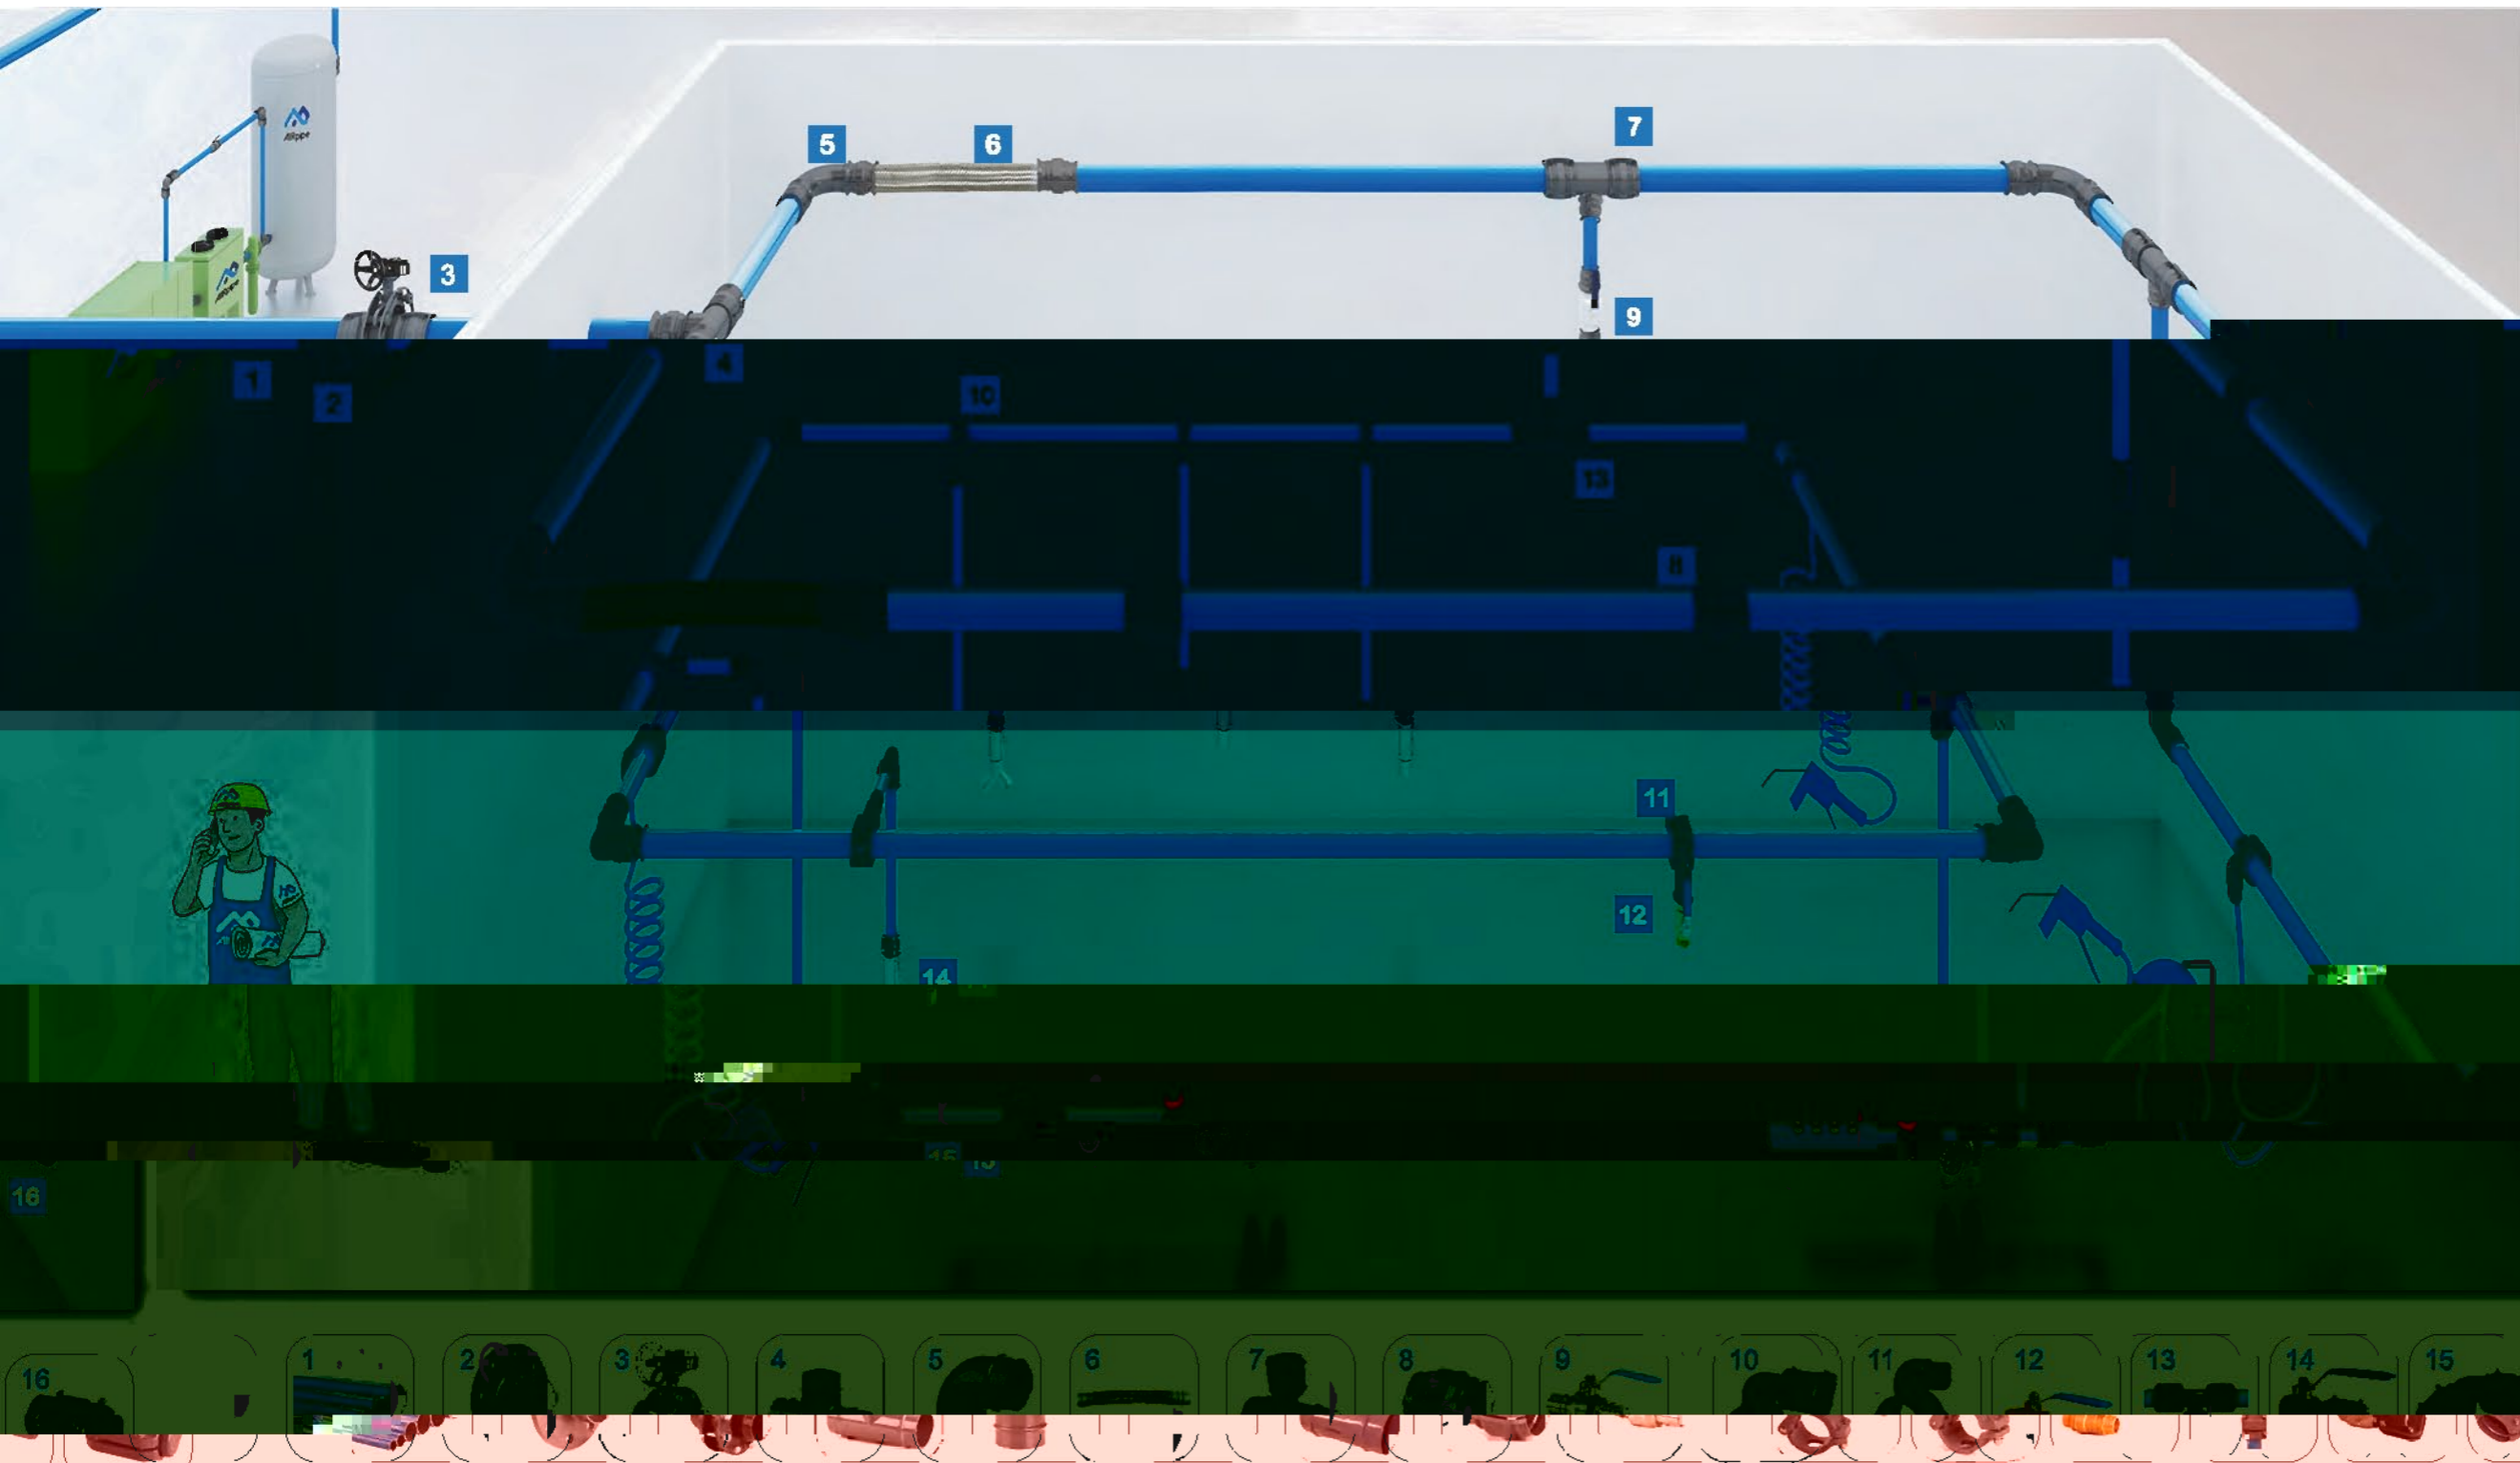


- | | | | | | | | |
|----------------------------|--------|-----------------------------------|-------|--------------------------------|--------|---------------------------------------|----------|
| 1 Aluminum Pipe | 剛性鋁合金管 | 5 Aluminum 90 Degree Elbow | 90度彎頭 | 5 Quick Plug Ball Valve | 快速連接球閥 | 5 Quick Plug Equal Tee | 快插組合等徑三通 |
| 2 Flanged Connector | 法蘭片 | 6 Flexible Hose | 彈性耐壓管 | 6 Aluminum Quick Drop | 支管快接頭 | 6 Thread Quick Plug Ball Valve | 快插組合螺紋球閥 |
| 3 Quick Connect | 快速連接螺帽 | 7 Quick Drop | 支管快接頭 | 7 Quick Drop | 支管快接頭 | 7 Quick Plug Equal Tee | 快插組合等徑三通 |

Product Range & Features

產品範圍和特性

Rigid Aluminum Pipe 剛性鋁合金管

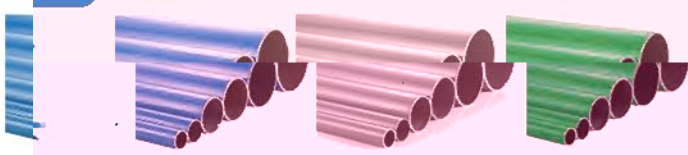

- Up to max.200mm diameter - 200m³/min flow single line.
- High-quality powder coating and colors customization.
- Designed for compressed air, vacuum, and inert gases.
- Light-weight & corrosion-free.
- 管徑最大200mm，最大流量200m³/min
- 高級粉體塗裝噴塗，耐久防腐，顏色可以定制
- 適用於所有噴油或無油壓縮空氣及惰性氣體
- 重量輕，防火UL90，可全天候室外安裝

Ball Valve & Butterfly Valves 快接球阀和蝶閥



- Quick connection.
- Available for BSP/NPT thread, flange, plug-in connection type.
- High-flow design ensures optimal performance.
- 一體式快接口，快速匹配管接頭
- 可選BSP或NPT標準螺紋，包括所有相關配件
- 高流速內徑設計耐久防腐

Pipe Connectors 快速管接頭



Flexible Hoses 彈性耐壓管



Accessories & Components 附件和工具



BLUE ALUMINUM PIPE 藍色鋁管

AIRpipe	DN	OD	ID
301 00 0100 01	20	20.1	17.5
301 00 0200 01	25	25.1	22.5
301 00 0400 01	40	40.1	36.5
301 00 0500 01	50	50.1	45.7
301 00 0600 01	63	67.6	63.0
301 00 0700 01	80	84.8	80.0
301 00 0800 01	100	101.8	96.8
301 00 0900 01	150	153.0	147.5
301 00 1000 01	200	205.0	197.8

*2.9M length please contact local sales.

GREEN ALUMINUM PIPE 綠色鋁管

5.8M Length

AIRpipe	DN	OD	ID
301 00 0100 03	20	20.1	17.5
301 00 0200 03	25	25.1	22.5
301 00 0400 03	40	40.1	36.5
301 00 0500 03	50	50.1	45.7
301 00 0600 03	63	67.6	63.0
301 00 0700 03	80	84.8	80.0
301 00 0800 03	100	101.8	96.8
301 00 0900 03	150	153.0	147.5

GRAY ALUMINUM PIPE 灰色鋁管

AIRpipe	DN	OD	ID
301 00 0100 02	20	20.1	17.5
301 00 0200 02	25	25.1	22.5
301 00 0400 02	40	40.1	36.5
301 00 0500 02	50	50.1	45.7
301 00 0600 02	63	67.6	63.0
301 00 0700 02	80	84.8	80.0
301 00 0800 02	100	101.8	96.8
301 00 0900 02	150	153.0	147.5
301 00 1000 02	200	205.0	197.8

*2.9M length please contact local sales.

END CAP 堵頭

AIRpipe	DN
302 08 0100 02	20
302 08 0200 02	25
302 08 0400 02	40
302 08 0500 02	50

*Union connector Included

EQUAL TEE PIPE CONNECTORS 等徑管接頭

AIRpipe	DN
302 02 0100 01	20
302 02 0200 01	25
302 02 0400 01	40
302 02 0500 01	50
302 02 0601 05	63
302 02 0701 08	80
302 02 0801 08	100
302 02 1001 05	150
302 02 1101 05	200

EQUAL TEE 等徑三通

AIRpipe	DN
302 05 0100 02	20
302 05 0200 02	25
302 05 0400 02	40
302 05 0500 02	50

*Union connectors included

302 05 0600 01	63
302 05 0700 01	80
302 05 0800 01	100
302 05 1000 01	150
302 05 1100 01	200

*Use three union connectors

REDUCING PIPE TO PIPE CONNECTORS 異徑管對管接頭

AIRpipe	DN
---------	----

302 06 0100 01	20
302 06 0200 01	25
302 06 0400 01	40
302 06 0500 01	50

302 06 0600 01	63
302 06 0700 01	80
302 06 0800 01	100

302 06 0900 01	150
302 06 1000 01	200

302 06 1100 01	250
----------------	-----

302 06 1200 01	300
----------------	-----

302 06 1300 01	350
----------------	-----

302 06 1400 01	400
----------------	-----

302 06 1500 01	450
----------------	-----

302 06 1600 01	500
----------------	-----

302 06 1700 01	550
----------------	-----

302 06 1800 01	600
----------------	-----

302 06 1900 01	650
----------------	-----

302 06 2000 01	700
----------------	-----

302 06 2100 01	750
----------------	-----

302 06 2200 01	800
----------------	-----

302 06 2300 01	850
----------------	-----

302 06 2400 01	900
----------------	-----

302 06 2500 01	950
----------------	-----

302 06 2600 01	1000
----------------	------

302 06 2700 01	1050
----------------	------

302 06 2800 01	1100
----------------	------

302 06 2900 01	1150
----------------	------

302 06 3000 01	1200
----------------	------

FIXTURE CLAMPS & ACCESSORIES
管夾





CLAMP SPACER
管夾墊



VORTEX FLOW METER
渦街流量計



THREADED ADAPTORS
轉接頭





PRESSURE METER
氣體壓力錶



ATMOLYSIS BAG
分析袋



SAMPLE BOX
演示包



TOOL BOX
工具箱



(TAPPER)



DRILL
鑽頭

DRILL HOLDER
鑽頭夾具



MARKER
記號器



FILE DEBURRER
去毛刺器



ALUMINUM PIPE DEBURRER
鋁管去毛刺器



SPANNERS
水泵鉗



ALUMINUM PIPE CUTTER
鋁管切割器



ELECTRIC PIPE CUTTER
電動鋁管切割機



FIXING BOLTS
螺栓



SQUARE PIPE STEEL
方鋼



ADJUSTABLE BRACKET
可伸縮支架



GRIDER CLAMP
老虎鉗



SQUARE STEEL CLAMP
壓板



TOOL
手電筒



SELF TAP SCREWS
螺絲



SELF TAP SCREWS
螺絲



WALL MOUNTED BRACKET
懸臂支架



UNIVERSAL BEAM SUSPENDER
外向抱箍吊扣



FIXTURE CLAMPS & ACCESSORIES
萬向抱箍



WIRE SUSPENSION CABLE
鋼絲繩



BUZZING MACHINE
凸管機



Superior Reliability!

最佳可靠性



Insertion Depth S For DN20-DN50 Connector
DN20-DN50 (3/4" - 2") 管路安裝插入深度S

DN	Insertion depth S (mm)	插入深度S (mm)
50		39

Deburr & Chamfer The Outer & Inner Edges Before Installation
安裝前去除管端切口內外的毛邊

- |
- |

Installation Guide for DN20~DN50 安裝指導DN20-DN50 (3/4" - 2")

